


# TEXLINE

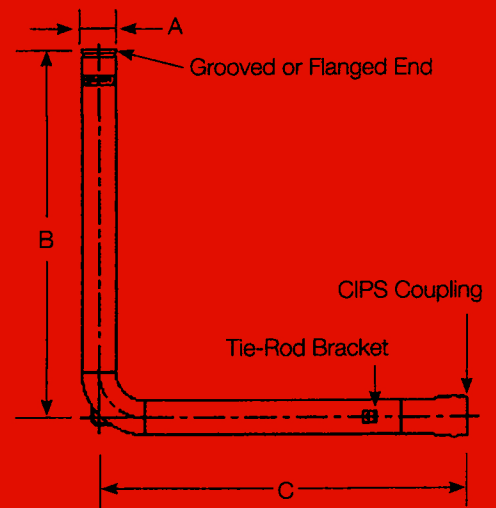

## FEATURES

- **SIZES AVAILABLE 2", 2 ½", 3", 4", 6" 8", 10", 12"**
- **PREBENDS AVAILABLE IN 4", 6", 8" - ALLOWING NO WELDS UNDER FOUNDATION**
- **STANDARD 6'X6' - SPECIAL LENGTHS MADE TO ORDER WITH BEST-IN-CLASS LEAD TIMES**
- **AVAILABLE IN FLANGED OR GROOVED ENDS**
- **CAP AND COUPLING INCLUDED**
- **UL LISTED FROM 24" TO 20' IN LENGTH**
- **SHOP TESTED PER UL 16200**
- **LIGHT WEIGHT 304 STAINLESS STEEL, SCH 10**
- **AWWA C900 INLET - AVAILABLE IN 4", 6", 8"**
- **FLANGED INLET AVAILABLE IN ALL SIZES**
- **LEAD FREE**

### Standards Met:

NFPA - Designed to allow the contractor to conform to NFPA 24 Section 8-3.2

### End Connections:

Horizontal End: Mates with Ductile Iron Pipe and AWWA C900 Pipe (PVC Pipe with Ductile Iron Pipe Equivalent OD's) or AWWA C-207 flanged ends

### Vertical End:

Meets AWWA C-606 dimensions for roll grooved pipe or AWWA C-207 flanged ends



 903.564.3554

 26449 State Highway  
56 Whitesboro,  
Texas 76273

 [www.texline.com](http://www.texline.com)

 [sales@texline.com](mailto:sales@texline.com)