


GROOVE SPECIFICATIONS

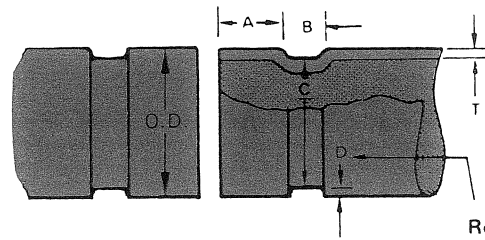

TEXLINE STANDARD ROLL GROOVE SPECIFICATIONS FOR STEEL PIPE

NOM. PIPE SIZE	PIPE OUTSIDE DIAMETER			GASKET SEAT A	GROOVE WIDTH B	GROOVE DIAMETER C		GROOVE DEPTH D	MIN. WALL THICK. T	MAX. FLARE DIA. INCHES
	ACTUAL INCHES	TOLERANCE				ACTUAL	TOL.			
		+	-							
1	1.315	0.028	0.015	0.625	0.281	1.190	0.015	0.063	0.065	1.360
1 1/4	1.660	0.029	0.016	0.625	0.281	1.535	0.015	0.063	0.065	1.705
1 1/2	1.900	0.019	0.019	0.625	0.281	1.775	0.015	0.063	0.065	1.945
2	2.338	0.024	0.024	0.625	0.344	2.250	0.015	0.063	0.065	2.447
2 1/2	2.875	0.029	0.029	0.625	0.344	2.720	0.018	0.078	0.083	2.962
3	3.500	0.035	0.031	0.625	0.344	3.344	0.018	0.078	0.083	3.566
3 1/2	4.000	0.040	0.031	0.625	0.344	3.834	0.020	0.083	0.083	4.071
4	4.500	0.045	0.031	0.625	0.344	4.334	0.020	0.083	0.083	4.576
5	5.563	0.056	0.031	0.625	0.344	5.395	0.022	0.084	0.109	5.650
6	6.625	0.063	0.031	0.625	0.344	6.455	0.022	0.085	0.109	6.719
8	8.625	0.063	0.031	0.750	0.469	8.441	0.025	0.092	0.109	8.719
10	10.75	0.063	0.031	0.750	0.469	10.562	0.027	0.094	0.134	10.844
12	12.75	0.063	0.031	0.750	0.469	12.531	0.030	0.109	0.156	12.844
14	14.00	0.063	0.031	0.938	0.469	13.781	0.030	0.109	0.156	14.094
16	16.00	0.063	0.031	0.938	0.469	15.781	0.030	0.109	0.165	16.094
18	18.00	0.063	0.031	1.000	0.469	17.781	0.030	0.109	0.165	18.094
20	20.00	0.063	0.031	1.000	0.469	19.781	0.030	0.109	0.188	20.094
24	24.00	0.063	0.031	1.000	0.500	23.656	0.030	0.172	0.218	24.100